





Hubei Kento Electronic Co., Ltd

Specification for LED Product 3AG4HD01

Package Dimensions(mm)

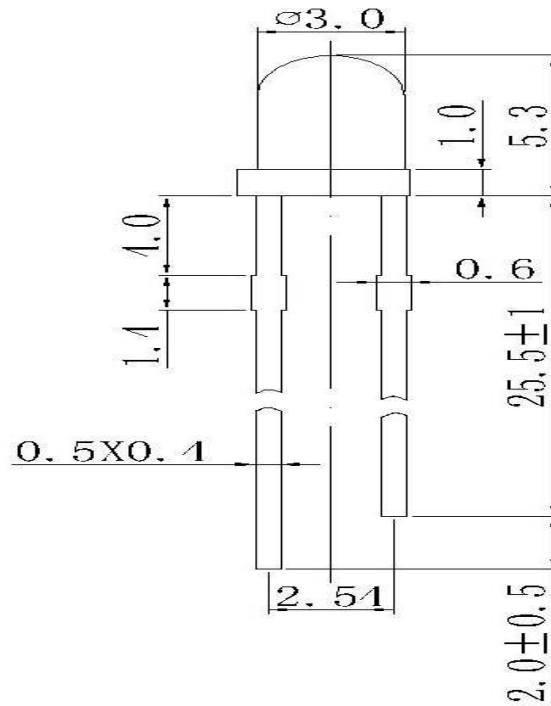

Notes:

All dimension units are millimeters.

All dimension tolerance is ± 0.2 mm unless otherwise noted.

An epoxy meniscus may extend about 1.5mm down the leads.

Burr around bottom of epoxy may be 0.5mm max.

Synopsis:

3mm Round Type

Green Diffused Lens

Green LED Lamp



Hubei Kento Electronic Co., Ltd

Typ 3AG4HD01						
Typical Electrical & Optical Characteristics (Ta = 25°)						
ITEMS	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Forward Voltage	VF	IF = 20mA	1.6	2.1	2.65	V
Reverse Current	IR	VR = 5V	---	---	1.1	μA
Dominant Wavelength	λD	IF = 20mA	570	---	574	nm
Luminous Intensity	IV	IF = 20mA	58	74	95	mcd
50% Power Viewing Angle	2θ½	IF = 20mA	---	38	---	deg
Absolute Maximum Ratings at (Ta = 25□)						
ITEMS	SYMBOL	ABSOLUTE MAXIMUM RATING				UNIT
Forward Current	IF	50				mA
Peak Forward Current	IFP	220				mA
Continuous Forward Current	IL	20				mA
Reverse Voltage	VR	5				V
Power Dissipation	PD	105				mW
Operation Temperature	Topr	-40 ~ +80				°C
Storage Temperature	Tstg	-40 ~ +80				°C
Lead Soldering Temperature	Tsol	Max.260°C for 5 sec Max.				

IFP Conditions Pulse Width 10msec duty 1/10


Tsol Conditions 4mm from the base of the epoxy bulb



Hubei Kento Electronic Co., Ltd

3AG4HD01

Spatial Distribution

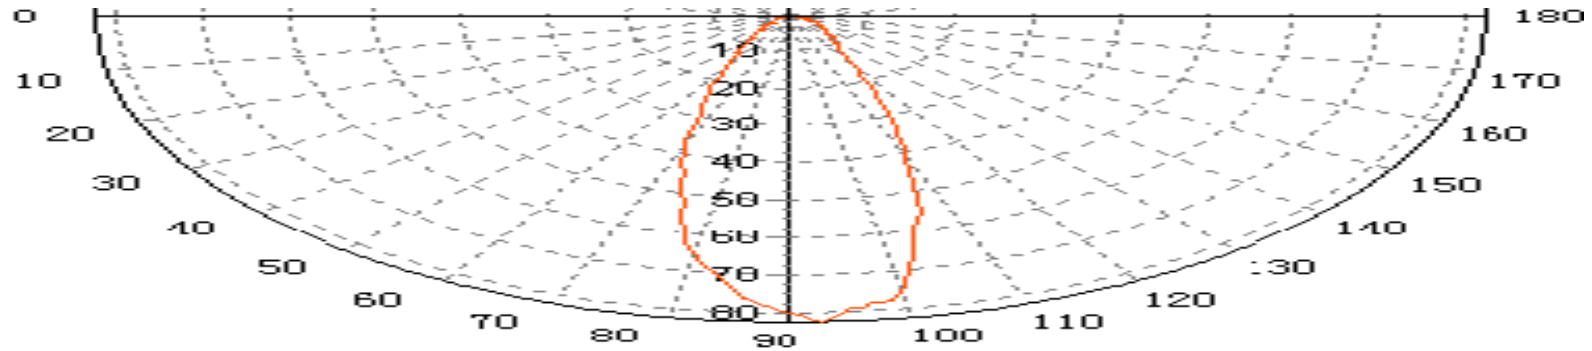

Reliability Performance


Test Classification	Test Item	Test Conditions	Test Duration	Sample Size	Standard
Life Test	Life Test	$T_a=25^{\circ}\pm 5\%$ / IF=20mA	1000(hrs)	10PCS	
Environment Test	Thermal Shock Test	$-10^{\circ}\pm 5\% \leftrightarrow +100^{\circ}\pm 5\%$ 5min. 10sec. 5min.	100(cycles)	10PCS	
	Temperature Cycle Test	$-55^{\circ}\pm 5\% \leftrightarrow +85^{\circ}\pm 5\%$ 30min. 5min. 30min.	100(cycles)	10PCS	
	High Temperature C High Humidity Test	$T_a=85^{\circ}\pm 5\%$ RH =85%±0.5 %RH	240(hrs)	10PCS	
	High Temperature Storage	$T_a=100^{\circ}\pm 5\%$	1000(hrs)	10PCS	
	Low Temperature Storage	$T_a=-55^{\circ}\pm 5\%$	1000(hrs)	10PCS	
Mechanical Test	Resistance to Soldering Heat	$T_a=260^{\circ}\pm 5\%$	5 (sec.)	10PCS	
	Lead Integrity	0.25 kg $0^{\circ} \sim 90^{\circ} \sim 0^{\circ}$	3 (times)	10PCS	




Hubei Kento Electronic Co., Ltd

3AG4HD01


Typical Optical/Electrical Characteristics Curves (Ta=25° Unless Otherwise Noted)

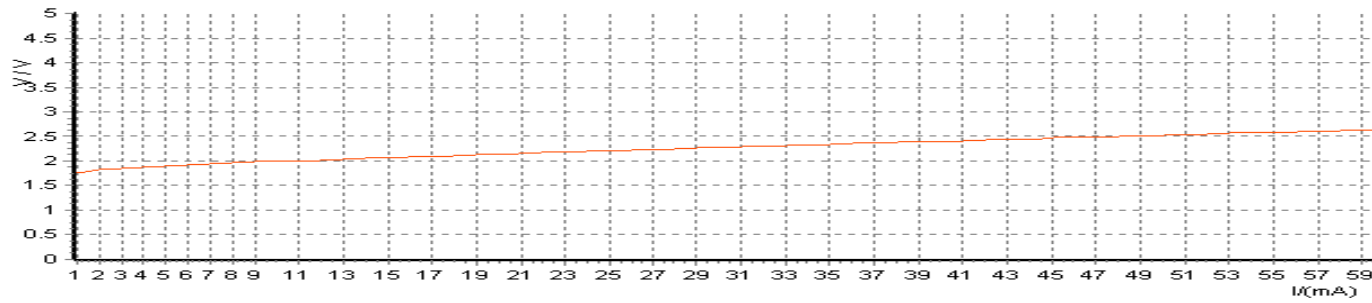

Current-Voltage Curve

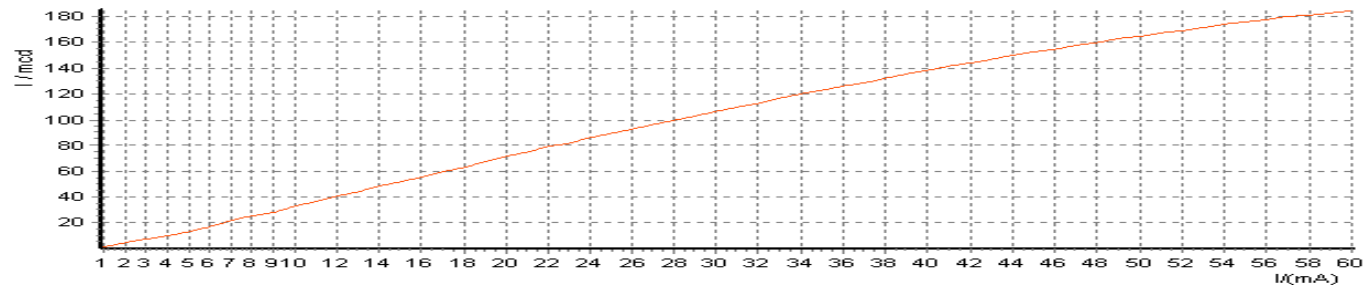

Current-Luminous intensity Curve

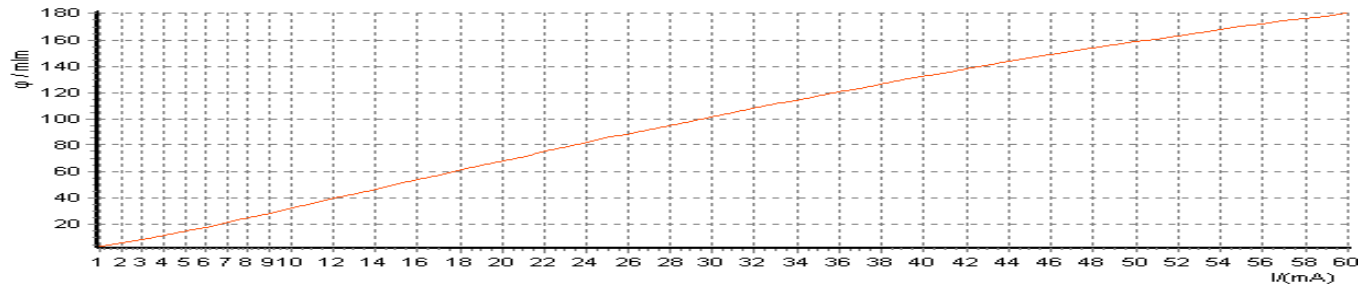

Current-Luminous flux Curve

Hubei Kento Electronic Co., Ltd

3AG4HD01

