





Hubei Kento Electronic Co., Ltd

Specification for LED Product

3AR4UC12

Package Dimensions(mm)

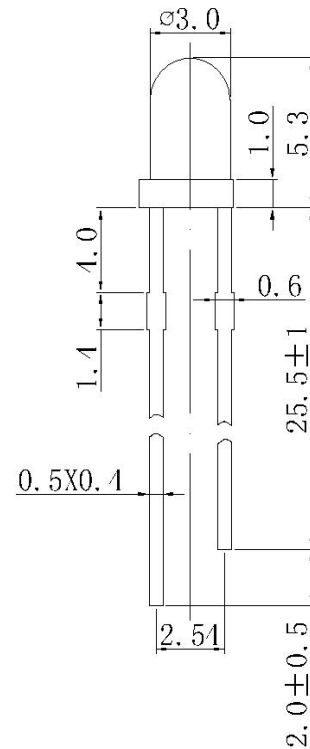

Notes:

All dimension units are millimeters.

All dimension tolerance is ± 0.2 mm unless otherwise noted.

An epoxy meniscus may extend about 1.5mm down the leads.

Burr around bottom of epoxy may be 0.5mm max.



Synopsis:

5mm Round Type

Water Clear Lens

Red LED Lamp



Hubei Kento Electronic Co., Ltd

3AR4UC12

Typical Electrical & Optical Characteristics (Ta = 25°)						
ITEMS	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Forward Voltage	VF	IF = 20mA	1.4	1.8	2.5	V
Reverse Current	IR	VR = 5V	---	---	1.1	μA
Dominant Wavelength	λ D	IF = 20mA	620	---	630	nm
Luminous Intensity	IV	IF = 20mA	152	200	278	mcd
50% Power Viewing	2θ½	IF = 20mA	---	48	---	deg
Absolute Maximum Ratings at (Ta = 25°)						
ITEMS	SYMBOL	ABSOLUTE MAXIMUM RATING			UNIT	
Forward Current	IF	50			mA	
Peak Forward Current	IFP	220			mA	
Continuous Forward Current	IL	20			mA	
Reverse Voltage	VR	5			V	
Power Dissipation	PD	90			mW	
Operation Temperature	Topr	-40 ~ +80			C	
Storage Temperature	Tstg	-40 ~ +80			C	
Lead Soldering Temperature	Tsol	Max.260°C for 5 sec Max.				

IFP Conditions Pulse Width 10msec duty 1/10


Tsol Conditions 4mm from the base of the epoxy bulb



Hubei Kento Electronic Co., Ltd

3AR4UC12

Spatial Distribution

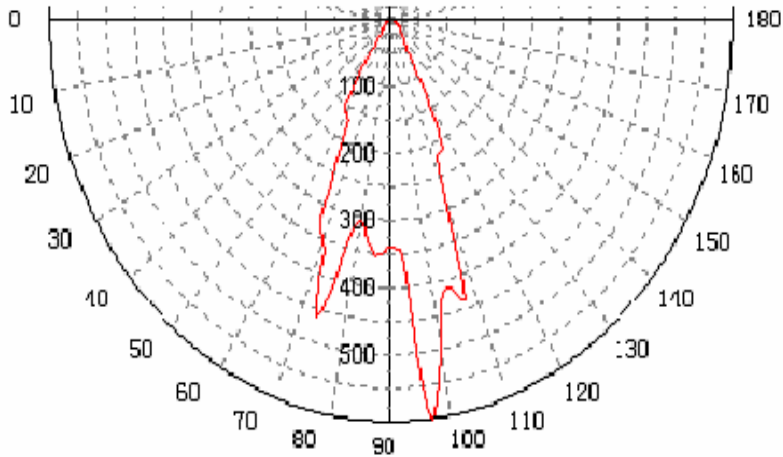

Reliability Performance


Test Classification	Test Item	Test Conditions	Test Duration	Sample Size	Standard
Life Test	Life Test	Ta=25°±5 IF=20mA	1000 hrs	10PCS	
Environment Test	Thermal Shock Test	-10°±5°←→+100°±5° 5min. 10sec. 5min.	100 cycles	10PCS	
	Temperature Cycle Test	0°±5°C←→+85°C±5° 30min. 5min. 30min.	100 cycles	10PCS	
	High Temperature and High Humidity Test	Ta=85°±5% RH =85%±0.5 %RH	240 hrs	10PCS	
	High Temperature Storage	Ta=100°±5%	1000 hrs	10PCS	
	Low Temperature Storage	Ta=-55°±5%	1000 hrs	10PCS	
Mechanical Test	Resistance to Soldering Heat	Ta=260°±5%	5 sec.	10PCS	
	Lead Integrity	负荷2.5 牛顿(0.25 千克) 0° ~ 90° ~ 0°	3 times	10PCS	




Hubei Kento Electronic Co., Ltd

3AR4UC12


Typical Optical/Electrical Characteristics Curves (Ta=25° Unless Otherwise Noted)

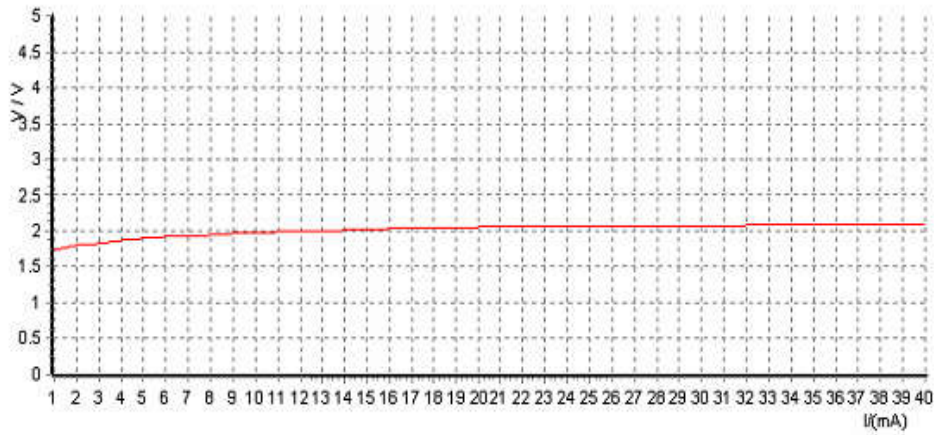

Current-Voltage Curve

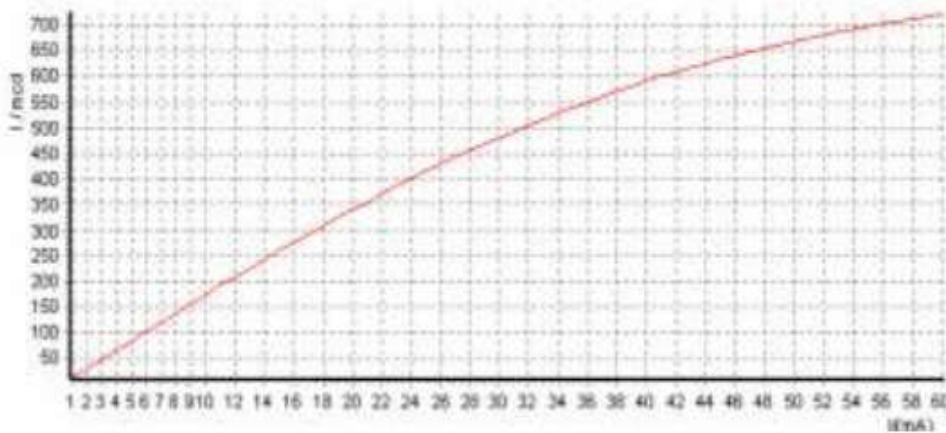

Current-Luminous intensity Curve


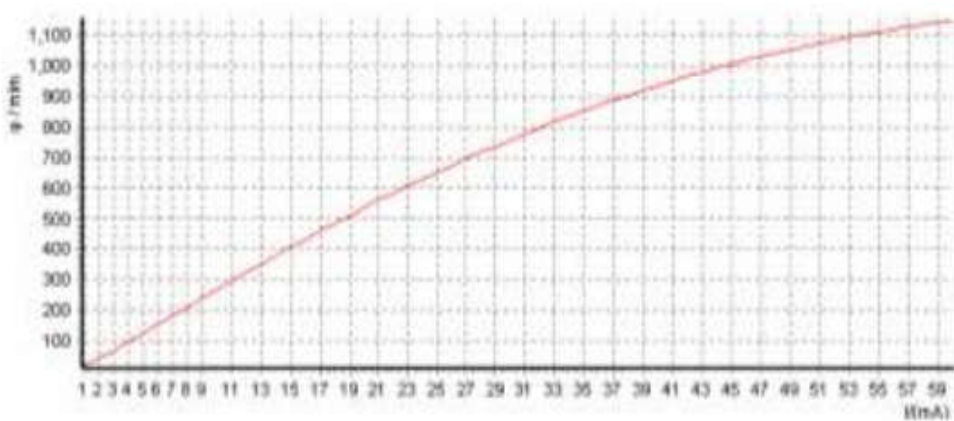


Current-Luminous flux Curve



Hubei Kento Electronic Co., Ltd

3AR4UC12

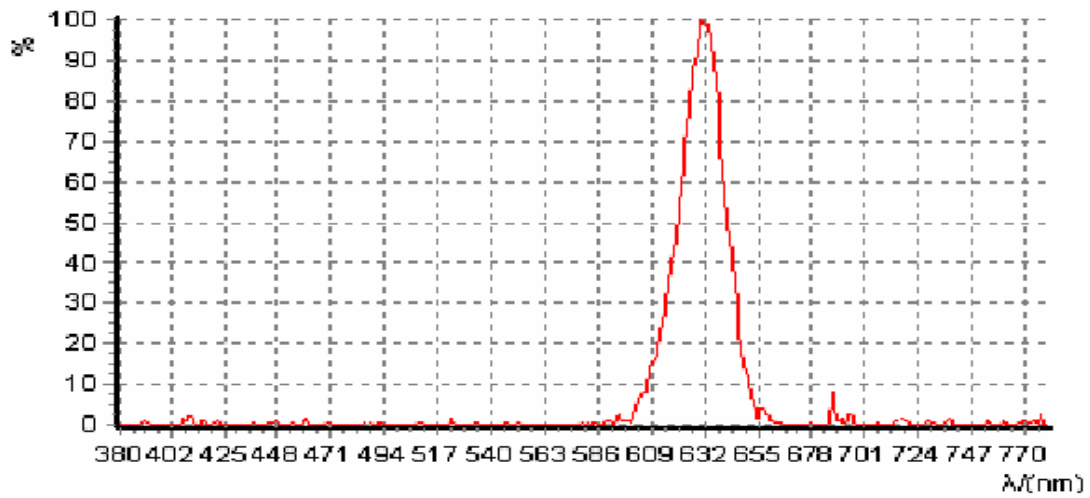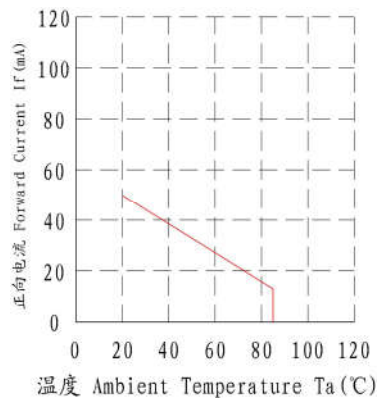

Wavelength

