




Hubei Kento Electronic Co., Ltd

Specification for LED Product

5AY3UD09

Package Dimensions(mm)

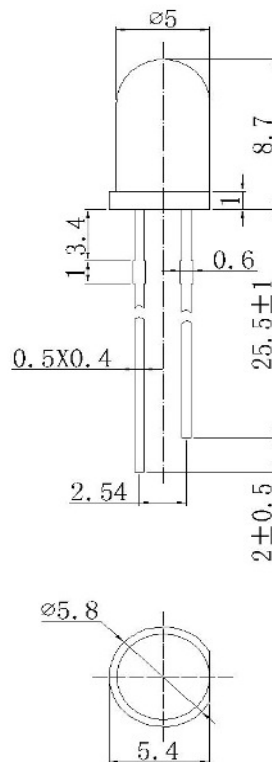

Notes:

All dimension units are millimeters.

All dimension tolerance is ± 0.2 mm unless otherwise noted.

An epoxy meniscus may extend about 1.5mm down the leads.

Burr around bottom of epoxy may be 0.5mm max.

Synopsis:	5mm Round Type	Yellow Diffused Lens
	Yellow LED Lamp	



Hubei Kento Electronic Co., Ltd

Typ 5AY3UD09						
Typical Electrical & Optical Characteristics (Ta = 25°)						
ITEMS	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Forward Voltage	VF	IF = 20mA	1.4	1.8	2.5	V
Reverse Current	IR	VR = 5V	---	---	1.1	μA
Dominant Wavelength	λD	IF = 20mA	587	---	595	nm
Luminous Intensity	IV	IF = 20mA	337	376	432	mcd
50% Power Viewing Angle	2θ½	IF = 20mA	---	27	---	deg
Absolute Maximum Ratings at (Ta = 25°)						
ITEMS	SYMBOL	ABSOLUTE MAXIMUM RATING				UNIT
Forward Current	IF	50				mA
Peak Forward Current	IFP	220				mA
Continuous Forward Current	IL	20				mA
Reverse Voltage	VR	5				V
Power Dissipation	PD	90				mW
Operation Temperature	Topr	-40 ~ +80				C
Storage Temperature	Tstg	-40 ~ +80				C
Lead Soldering Temperature	Tsol	Max.260°C for 5 sec Max.				

IFP Conditions Pulse Width 10msec duty 1/10


Tsol Conditions 4mm from the base of the epoxy bulb



Hubei Kento Electronic Co., Ltd

5AY3UD09

Spatial Distribution

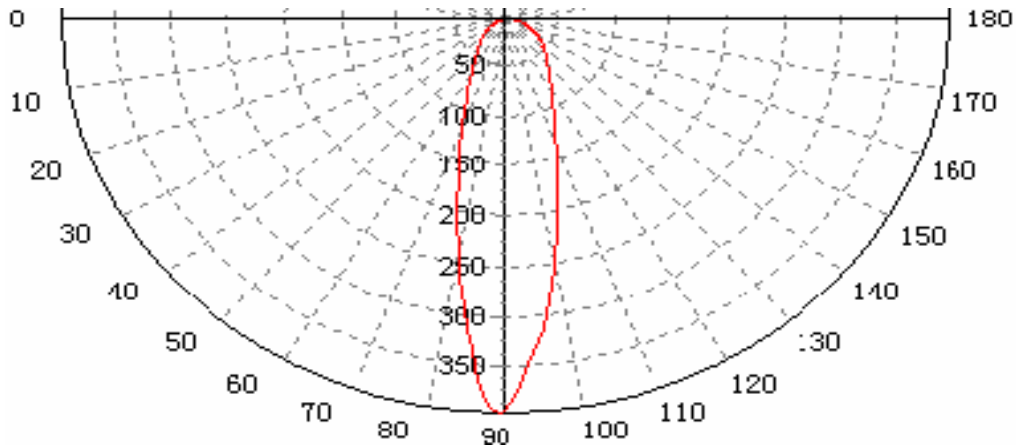

Reliability Performance


Test Classification	Test Item	Test Conditions	Test Duration	Sample Size	Standard
Life Test	Life Test	Ta=25°±5 IF=20mA	1000 hrs	10PCS	
Environment Test	Thermal Shock	-10°±5° ← → +100°±5° 5min. 10sec. 5min.	100 cycle	10PCS	
	Temperature Cycle	-55°±5° ← → +85°±5° 30min. 5min. 30min.	100 cycle	10PCS	
	High Temp High Hum	Ta=85°±5% RH =85%±0.5 %RH	240 hrs	10PCS	
	High Temp Storage	Ta=100°±5%	1000 hrs	10PCS	
	Low Temp Storage	Ta=-55°±5%	1000 hrs	10PCS	
Mechanical Test	Resistance Soldering	Ta=260°±5%	5 sec.	10PCS	
	Lead Intert	□□2.5 □□(0.25 □□) 0° ~ 90° ~ 0°	3 times	10PCS	




Hubei Kento Electronic Co., Ltd

5AY3UD09


Typical Optical/Electrical Characteristics Curves (Ta=25° Unless Otherwise Noted)

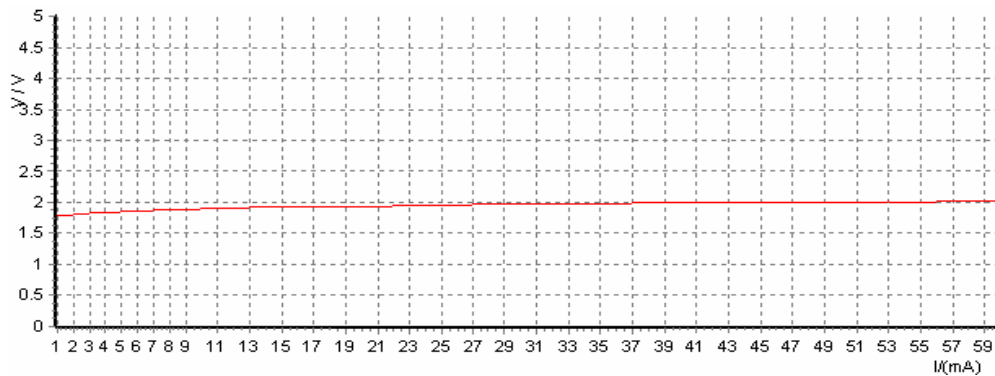

Current-Voltage Curve

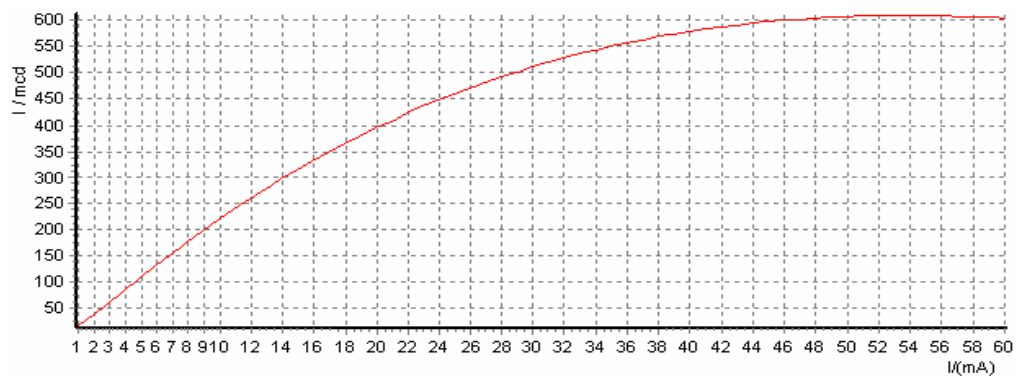



Current-Luminous intensity Curve

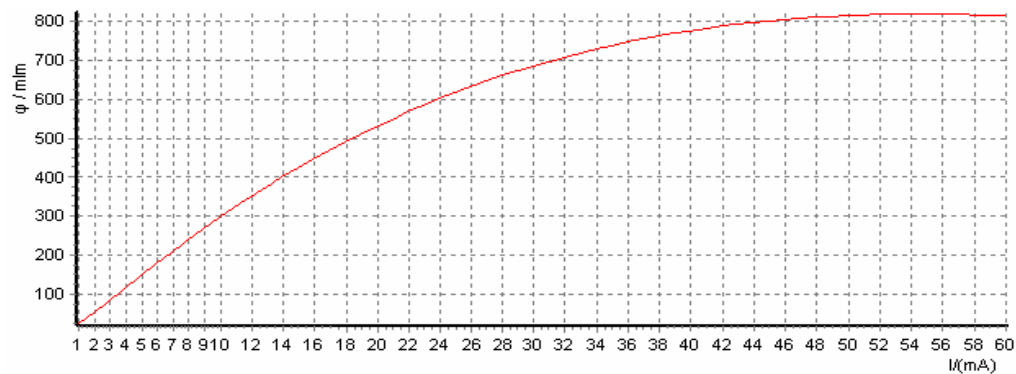

Current-Luminous flux Curve

Hubei Kento Electronic Co., Ltd

5AY3UD09

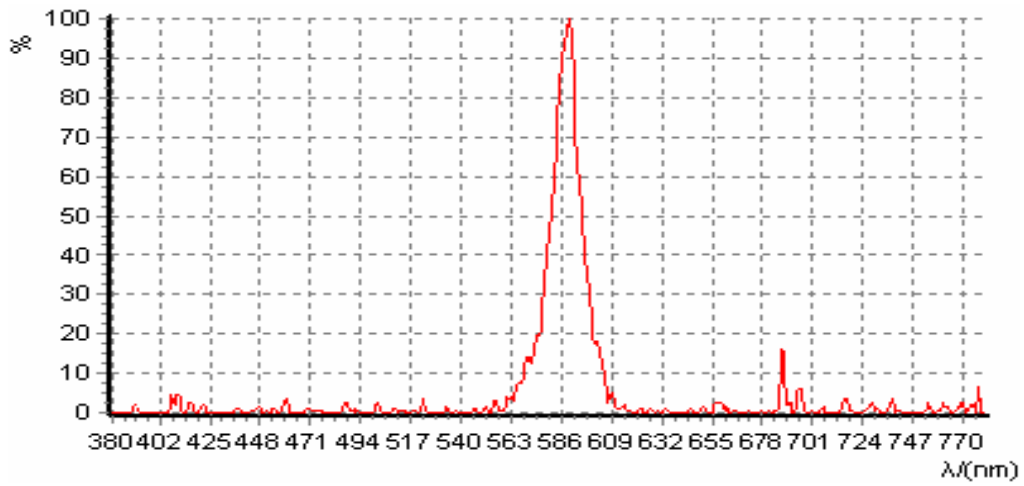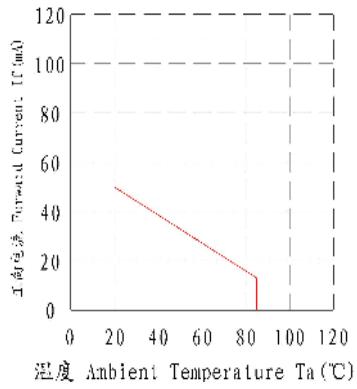

Wavelength

