
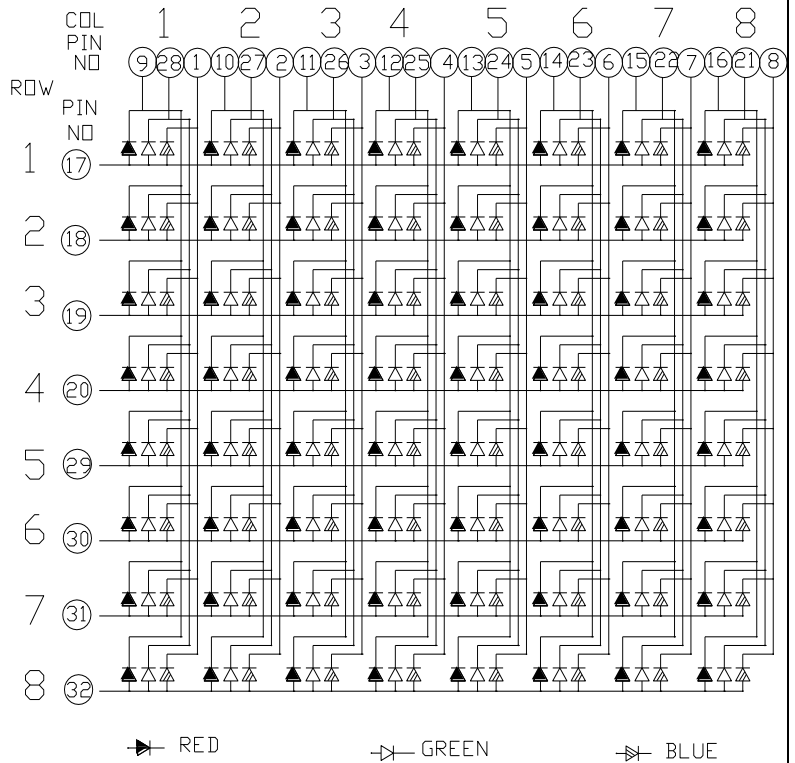


单位:毫米(mm)
公差:±0.15

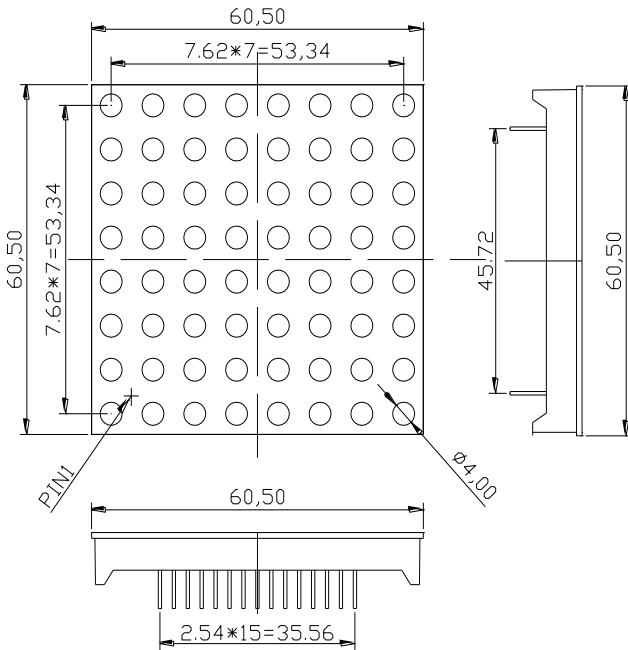

Electro-Optical characteristic(Ta=+25℃)光电特性 (温度=+25℃)

PRODUCTMODEL 产品型号	Emitted color 发光颜色	Forward voltage 正向电压(VF) (IF=20MA)/VF		Luminous intensity 亮度(mcd) (IF=20MA) VF		Dominant Wavelength 主波长 (nm) (IF=20MA)/λ d
		MIN	TYP	MIN	TYP	
GTM2088ARGB-21	RED	1.9	2.3	90	100	622~625
	GREEN	3.0	3.4	240	270	522.5~523.5
	BLUE	3.0	3.4	70	80	466.25~467.5

ABSOLUTE MAXIMUM RATINGS (Ta=25)最大额定值 (温度=25℃)

Reverse voltage (V) 逆向电压	Continuous Forward Current (mA) 瞬间正向电流	Peak forward Current (mA) 峰值正向电流	Power dissipation (mw) 消耗功率	Operation Temperature range (°C) 工作温度	Storage temperature Range (°C) 储藏温度
8	50	70	150	-40~80	-40~80
Approved By		Checked By		Designed By	