



### 5RT

### RADIAL LEAD MICRO FUSE (TIME-LAG)

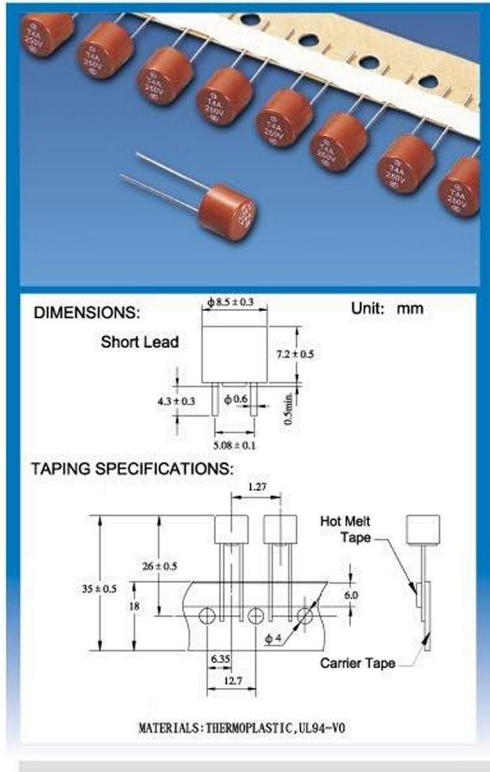

5RT RoHS I-T CHARACTERISTICS CURVE  
5RT RoHS

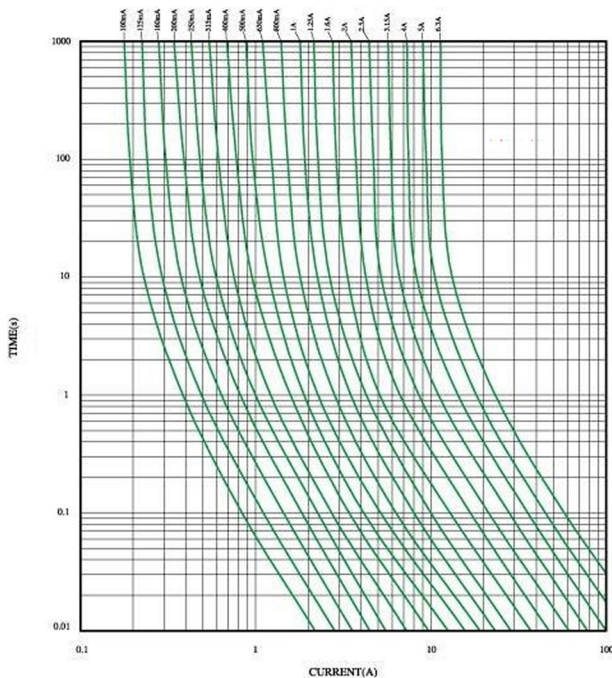

CATALOG NO.	AMPERE RATING	mv MAX VOLTAGE DROP	APPROVALS						I <sup>2</sup> T REFERENCE (A.S) (RoHS)
			CCC	SEMKO	VDE	UR	BSI	PSE	
5RT-0100H	100mA	350	●	●	●	●	●	0.02	
5RT-0125H	125mA	300	●	●	●	●	●	0.04	
5RT-0160H	160mA	280	●	●	●	●	●	0.08	
5RT-0200H	200mA	260	●	●	●	●	●	0.12	
5RT-0250H	250mA	240	●	●	●	●	●	0.40	
5RT-0315H	315mA	220	●	●	●	●	●	0.61	
5RT-0400H	400mA	200	●	●	●	●	●	1.03	
5RT-0500H	500mA	190	●	●	●	●	●	1.62	
5RT-0630H	630mA	180	●	●	●	●	●	2.48	
5RT-0800H	800mA	160	●	●	●	●	●	3.65	
5RT-010H	1A	140	●	●	●	●	●	6.07	
5RT-013H	1.25A	130	●	●	●	●	●	10.06	
5RT-016H	1.6A	120	●	●	●	●	●	16	
5RT-020H	2A	100	●	●	●	●	●	23.6	
5RT-025H	2.5A	100	●	●	●	●	●	38	
5RT-032H	3.15A	100	●	●	●	●	●	60	
5RT-040H	4A	100	●	●	●	●	●	95	
5RT-050H	5A	100	●	●	●	●	●	152	
5RT-063H	6.3A	100	●	●	●	●	●	248	

H DENOTES FOR 250V

● DENOTES FOR APPROVED

BREAKING CAPACITY:

CCC/SEMKO/VDE/UL/CUR: 35A OR 10In WHICHEVER IS GREATER


PSE: 100A 250V AC

#### ELECTRICAL CHARACTERISTICS:

RATING		BLOWING TIME
2.1In	Max	2min
	Min	400ms
2.75In	Max	10sec
	Min	150ms
4In	Max	3sec
	Min	20ms
10In	Max	150ms
	Min	

#### PACKAGING:

- INNER BOX : AMMO PACK



1,000 pcs taped in one box

- OUTER CARTON: 10 INNER BOXES/CARTON  
CARTON SIZE: L355xW450xH265(mm)