
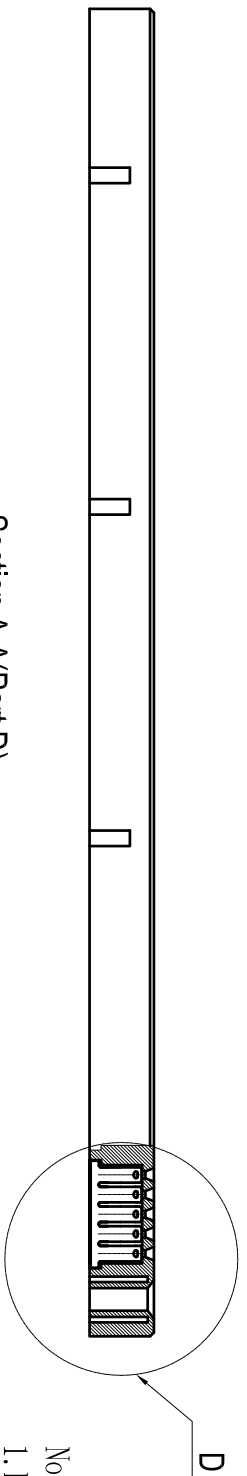
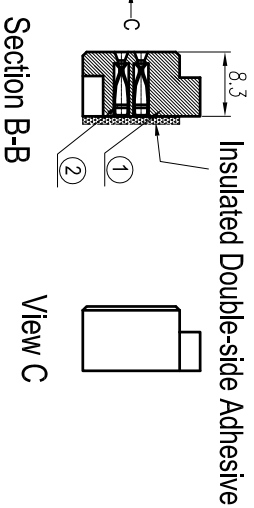


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
Δ	New Publish		

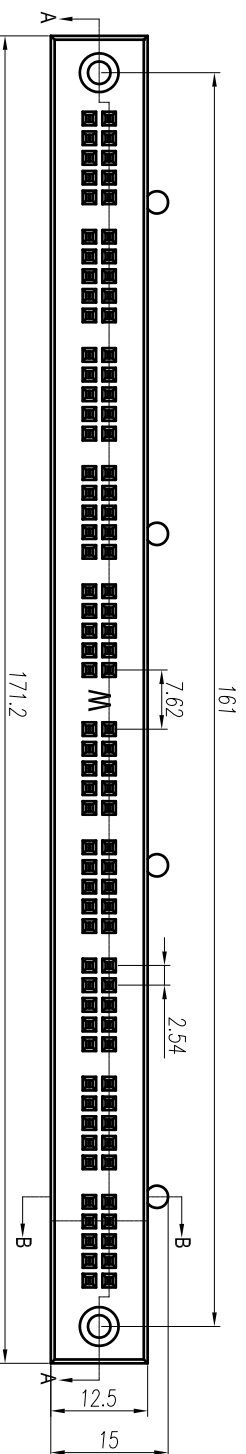

Section A-A(Part D)

Notes:

1. Pitch: 2.54mm
2. 1 Distribution Strip: 100tie-point
3. Rated voltage/current: 3 0 0 V / 3-5 A
4. Insulation resistance: 500MΩ/DC500V
5. Withstanding voltage: AC1000V/1Min
6. Wire range: 29~20 AWG
7. Temp. Range: -25° c~+80° c
- Strip length: 7-8mm
8. Undimensioned Tolerances:

TOLERANCES EXCEPT AS NOTED

	linear dimension	fillet	chamfer	short angle sid	≡	—	∇	//	⊥
variable range	over 6 to 30	over 30 to 120	over 120 to 480	over 10 to 50	over 50 to 120	all to 5	over 5 to 30	over 30 to 120	over 120 to 120
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°

2	BB-D-126/126-Fine Clamp	7001B00030	4	Phosphor Bronze	Ni Plated
1	BB-01-1-1-Body	7046AYY01A	1	ABS	UL 94V-2
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	WJY	DATE	08/22/11	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
		DWG NO.	SP-2-7046001		
		TITLE	BB-01-1-1(-YY)		
			Distribution Ship		



CIXI WANJIE ELECTRONIC CO., LTD