
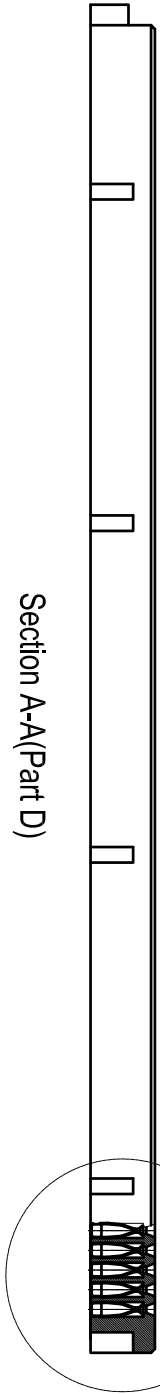
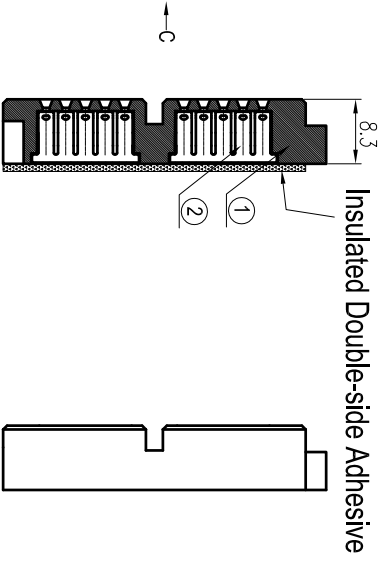


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
1	New Publish		

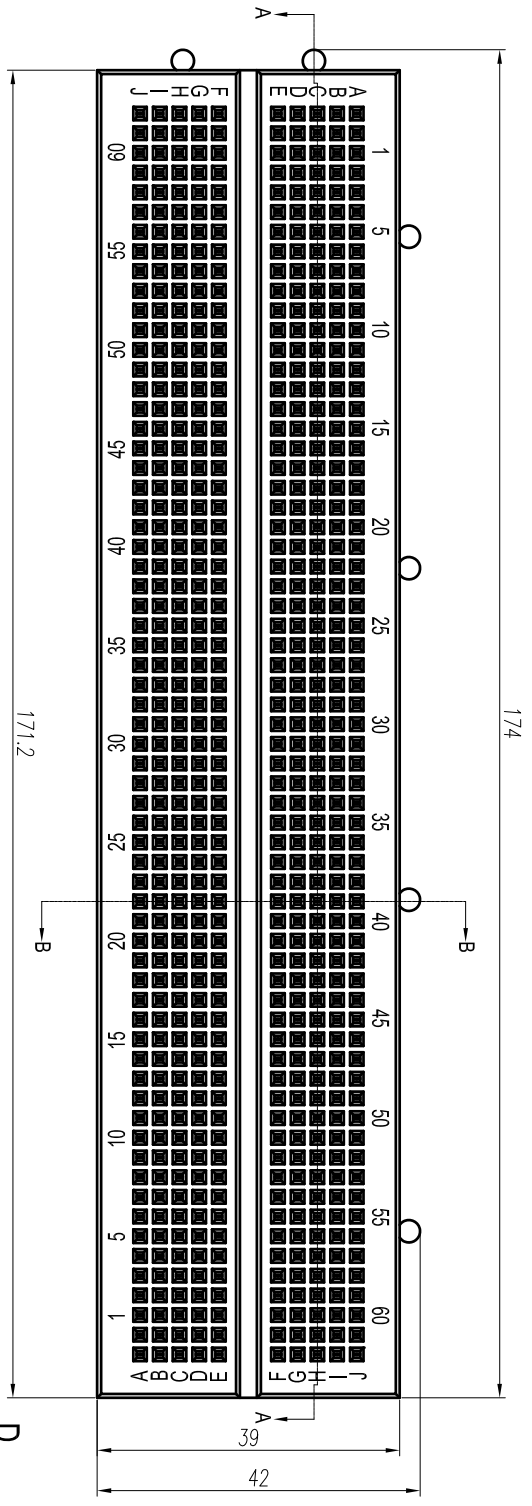

- Notes:
- Pitch: 2.54mm
 - 1 Terminal Strip: 640 Tie-point
 - Rated voltage/current: 3 0 0 V / 3 - 5 A
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding voltage: AC1000V/1Min
 - Wire range: 29~2 0 AWG
 - Temp. Range: -25° c~+80° c
 - Strip length: 7-8mm
 - Undimensioned Tolerances:

TOLERANCES EXCEPT AS NOTED

	linear dimension	fillet	chamfer	short angle	sid	≡	—	□	//	⊥							
variable range	6 to 30	30 to 120	120 to 480	all to 6	6 to 10	10 to 50	50 to 120	all to 5	5 to 30	30 to 120							
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

2	BB-T-126/128 Clamp	7001B00010	128	Phosphor Bronze	Ni Plated
1	BB-01-2-Body	7014AYY01A	1	ABS	UL 94V-2
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	WJY	DATE	08/22/11	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-7014001
				TITLE	BB-01-2(Y)
					Terminal Strip

