

Features


- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Guardring for overvoltage protection
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High surge capability
- Comply with RoHS standard

Applications

- Low Voltage, High Frequency Inverters
- Free Wheeling, and Polarity Protection Applications

Mechanical Data

- package: DO-41
- Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
- Mounting Position : Any

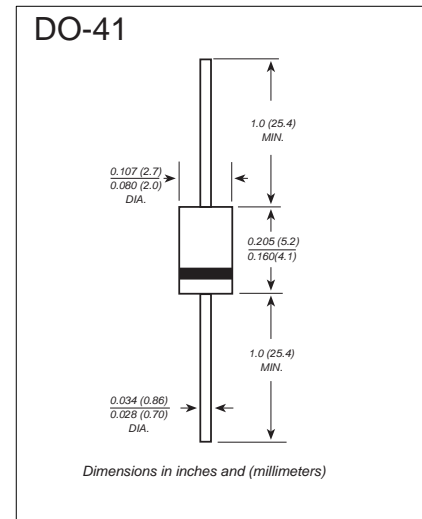

Maximum Ratings And Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

	SYMBOLS	1N5817	1N5818	1N5819	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	VOLTS
Maximum RMS voltage	V_{RMS}	14	21	28	VOLTS
Maximum DC blocking voltage	V_{DC}	20	30	40	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_L=90^\circ\text{C}$	I_{AV}	1.0			Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	25.0			Amps
Maximum instantaneous forward voltage at 1.0A	V_F	0.450	0.550	0.600	Volts
Maximum DC reverse current at rated DC blocking voltage	I_R	0.5 10.0			mA
Typical junction capacitance (NOTE 1)	C_J	110.0			pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	50.0			$^\circ\text{C}/\text{W}$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +125			$^\circ\text{C}$

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted



■ Characteristics Curves($T_A=25^\circ\text{C}$ unless otherwise noted)

FIG. 1- FORWARD CURRENT DERATING CURVE

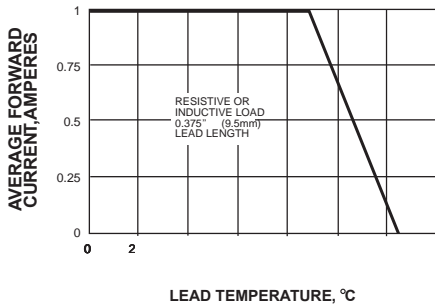


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

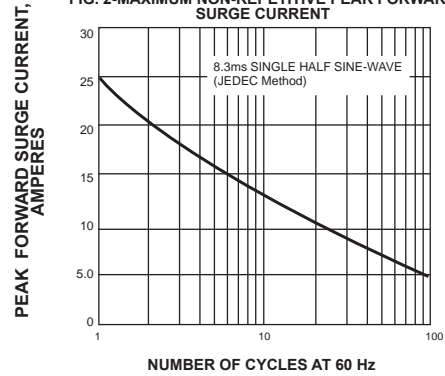


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

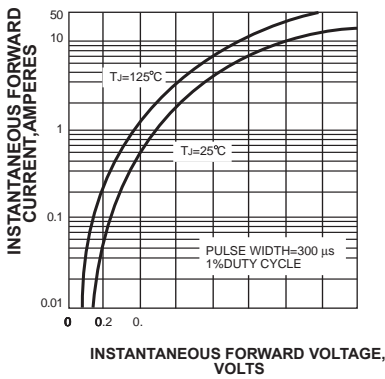


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

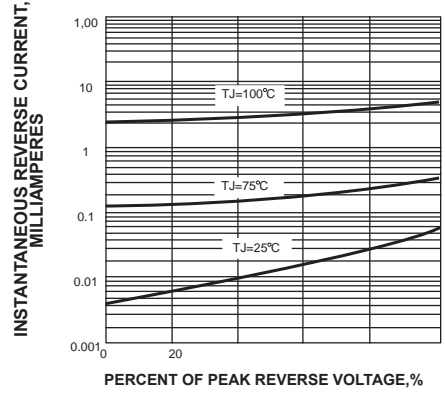


FIG. 5-TYPICAL JUNCTION CAPACITANCE

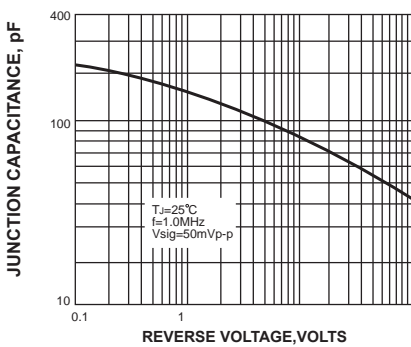


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

